


ΒΑΛΒΙΔΕΣ ΑΝΤΕΠΙΣΤΡΟΦΗΣ ΟΡΕΙΧΑΛΚΙΝΕΣ

2929xxA 1/1

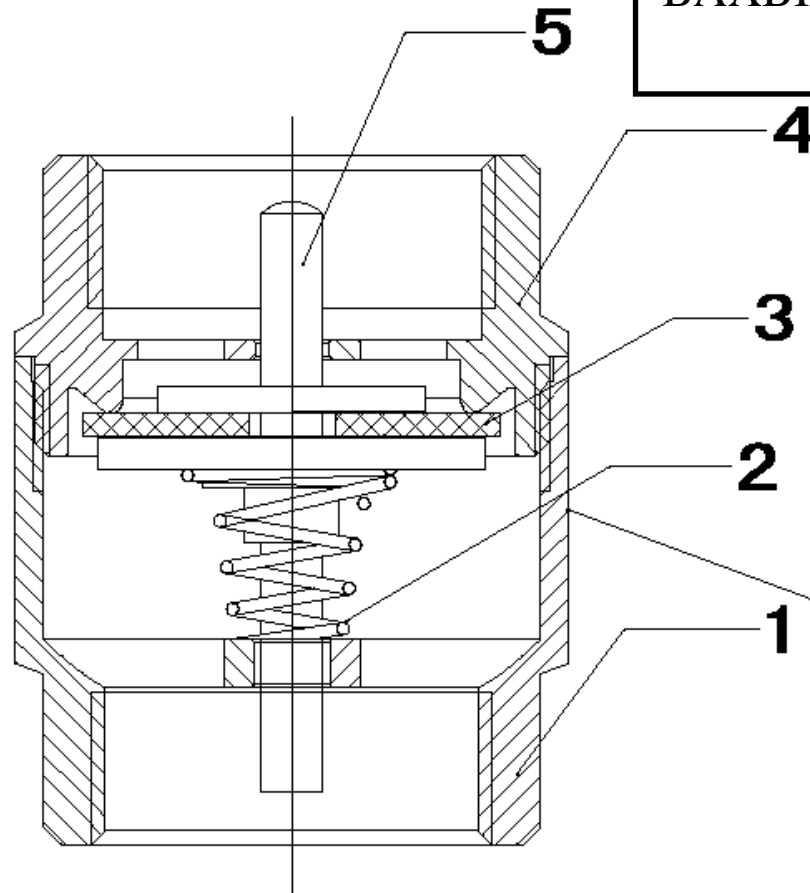

technique request:

1. the glaze should be 1.6um after assembling.
2. print the logo (the words should be clear) .
3. surface should be free from any dirty and breakage
should be shining.
4. without any leakage under water pressure 0.8Mpa

without any
diastema after
assembling

5	stem	1	plastic	2551013		
4	cap	1	HPb59-1	200052		
3	seat	1	rubber	200720		
2	spring	1	stainless steel	300132		
1	body	1	HPb59-1	155012		
NO.	description	quantity	material	code	weight	Remark



½"-4" CHECK
VALVE

KF-G009

21/12/2005