


HYDRAULIC INSPECTION

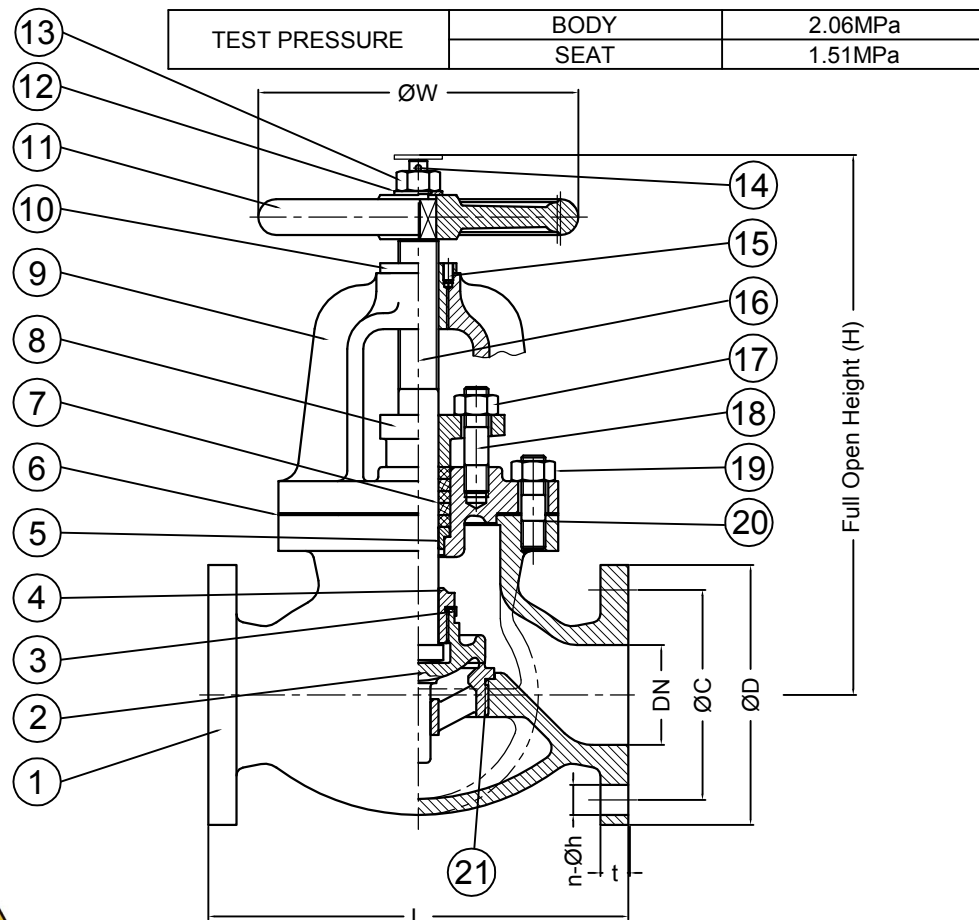

Full Open Height (H)

PRESSURE RATING

FLUID CONDITION	MAXIMUM WORKING PRESSURE
STEAM OF 205°C OR LESS	0.98MPa
SATURATED STEAM	
AIR AND GAS	
OIL AND PULSATION WATER	1.37MPa
NON-SHOCK WATER OF 120°C OR LESS	

21	SEAT	STAINLESS STEEL	SS420
20	STUD BOLT	STEEL	SS400
19	HEXAGON NUT	STEEL	SS400
18	STUD BOLT	STEEL	SS400
17	HEXAGON NUT	STEEL	SS400
16	STEM	STAINLESS STEEL	SS420
15	SET SCREW	STEEL	SS400
14	SPLIT PIN	STAINLESS STEEL	SS304
13	HEXAGON NUT	STEEL	SS400
12	WASHER	STEEL	SS400
11	HAND WHEEL	CAST IRON	FC200
10	BONNET BUSH	CAST BRONZE	BC6
9	BONNET	CAST IRON	FC200
8	PACKING GLAND	STAINLESS STEEL	SS420
7	PACKING	FLEXIBLE GRAPHITE	
6	GASKET	NON-ASBESTOS	
5	PACKING BUSH	STAINLESS STEEL	SS420J2
4	DISC NUT	STAINLESS STEEL	SS420J2
3	DISC LOCK WASHER	STAINLESS STEEL	SS304
2	DISC	STAINLESS STEEL	SS420
1	BODY	CAST IRON	FC200

NO.	NAME OF PART		MATERIAL		MARK	
REV	DATE	DESCRIPTION OF REASON		DWG	CHK'D	APP'D
DESCRIPTION		JIS F7307 10K CAST IRON GLOBE VALVES				
DWG		CHK'D	APP'D	SCALE	NON	
Bing Lee		KIM	Bing.	UNIT	mm	
DATE		Mar.05,2016	DWG NO.			REV 0
						



MAIN DIMENSION FOR CONNECTING mm

MODEL	PN/DN	FACE TO FACE	FLANGE DIMENSIONS				WIDTH	HEIGHT	WEIGHT
		L	ØD	ØC	n-Øh	t			
F7307	10K50	220	155	120	4*19	20	160	285	19.9
F7307	10K65	270	175	140	4*19	22	200	310	28.7
F7307	10K80	300	185	150	8*19	22	200	320	32.4
F7307	10K100	350	210	175	8*19	24	250	370	48.7
F7307	10K125	420	250	210	8*23	24	280	420	73.1