



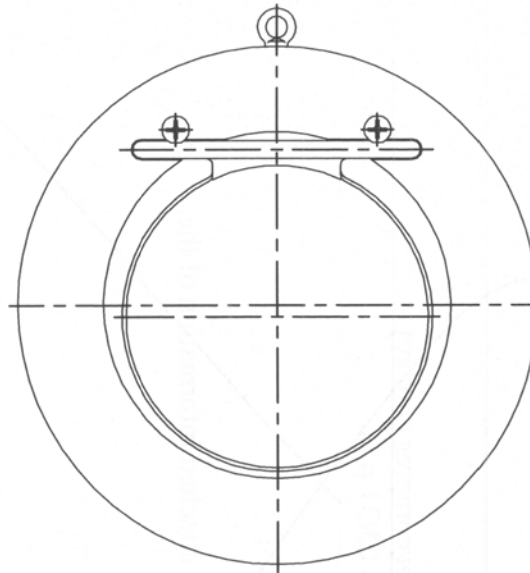

CHRYSSAFIDIS

ΚΛΑΠΕ ΑΝΟΞΕΙΔΩΤΟΥ ΔΙΣΚΟΥ PN16

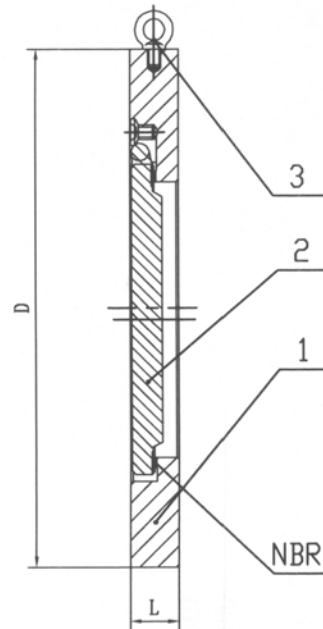

NPS	DN	D	L
2"	50	108	19
2 1/2"	65	128	19
3"	80	142	19
4"	100	162	19
5"	125	192	19
6"	150	218	19
8"	200	273	29

Technical Requirements

1. Design & manufacture conform to JB/T8937-1999.
2. Test & Inspect conform to JB/T9092-1999.
3. Face to Face dimension conforms to GB/T15188.2-1994.
4. Flange dimension conforms to JB/T 79.1-94

PN		16	MPa
Test Pre- ssure	Shell Test	2.4	
	Seal Test	1.76	
	Air Test	//	
SuitableTemp		-29℃-82℃	
Suitable Media		W.O.G. etc.	

3	Lifting Eye	ASTM A193 B7	
2	disc	ASTM A351 CF8 (or 301)	
1	body	ASTM A216 WCB+NBR	
Item	Part Name	Material	
DESIGN BY			
CHECKED BY			
STANDARD BY			DRAWING NO
APPROVED BY			REV
			H74X-PN16-00
			CHECK VALVE
THE USER CONFIRM		DATE	2008-09-18