



0204 • 1/2" - 4"

ΜΕΙΩΤΕΣ ΠΙΕΣΗΣ PN40 2969xxA 1/1

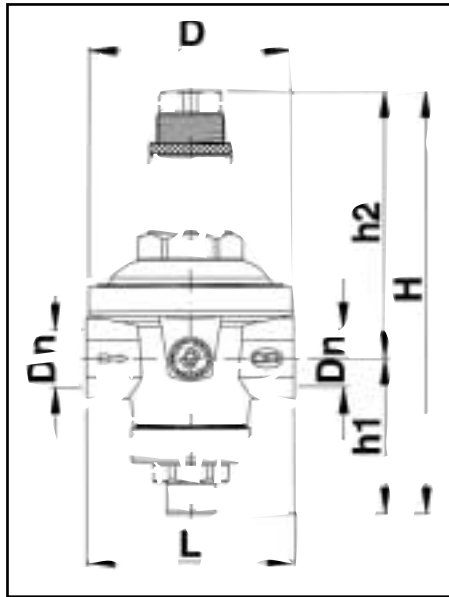

PRESSURE REDUCING VALVE PN 40 WITH COMPENSATION AND STAINLESS STEEL SEAT
 1/2" - 2" brass UNI EN 12165:98
 2.1/2" - 4" bronze G-CuSnZn5Pb5) UNI 5035
 Diaphragm NBR with textile inserts - Washers NBR
 STAINLESS STEEL SEAT AISI 303
Connections: Female/Female

P_{in} max: 40bar - P_{out}: 1 bar - 7 bar +/-5%
P_{max}: 80°C
DIAGRAM FLOW
CHARGE LOSSES



ΧΡΥΣΑΦΙΔΗΣ Α.Ε.

Dn	L	D	H	h1	h2
1/2"	76	Ø 73	155,5	67,5	88
3/4"	91	Ø 89	196	73	123
1"	105	Ø 101	201	81	120
1"1/4	138	Ø 124	235	82,5	152,5
1"1/2	170	Ø 154	256	95	161
2"	184	Ø 169	270	92,5	177,5
2"1/2	206,5	Ø 180	330	121,5	208,5
3"	204	Ø 192	374	143	231
4"	274	Ø 262	495,5	175	320,5

