




ΒΑΛΒΙΔΕΣ ΑΣΦΑΛΕΙΑΣ ΙΣΙΕΣ

1810 / 1820 / 1830 • 3/8" - 2"1/2" 2985xxA 1/1

VALVOLE DI SICUREZZA A MOLLA TARABILI
SETTING SAFETY VALVES WITH SPRING

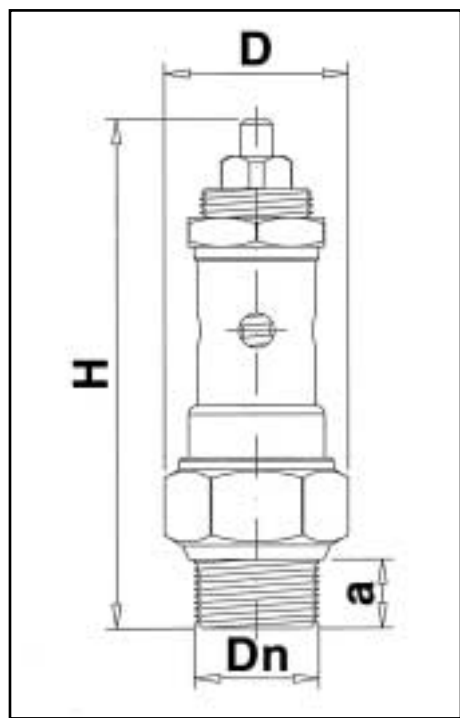

Dn	D	H	a
1/4"	Ø 29	88	10
3/8"	Ø 30	87	11
1/2"	Ø 31	89	12
3/4"	Ø 43	109	15
1"	Ø 52	124	17
1"1/4	Ø 66	145	23
1"1/2	Ø 74	158	23
2"	Ø 88	177	25

VALVOLA DI SICUREZZA A MOLLA SCARICO LIBERO
SEDE METALLO (MOD. 1810) - SEDE GOMMA (MOD. 1820) - SEDE TEFLON (MOD. 1830)
FREE SAFETY VALVE WITH SPRING
METAL SEAT (ITEM 1810) - RUBBER SEAT (ITEM 1820) - TEFLON SEAT (ITEM 1830)



PORTATE DI SCARICO PER ARIA-AZOTO-GAS VARI ART. 1811-1821-1831-1810-1820-1830
DESCHARGE FLOW FOR AIR-AZOTE-VARIOUS GAS ITEM 1811-1821-1831-1810-1820-1830

DN	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"
DO	10	15	19	24,5	31,5	38	48	64	75
AREA NETTA cm² SEAT SURFACE	0,400	1,295	1,980	4,190	7,450	10,930	16,990	30,110	41,880
BAR	W kg/h	W kg/h	W kg/h	W kg/h	W kg/h	W kg/h	W kg/h	W kg/h	W kg/h
PRESSIONE DI TARATURA - SETTING PRESSURE	1	2,82	9,12	13,94	29,50	52,46	76,96	119,62	294,84
	2	4,23	13,68	20,91	44,25	78,69	115,44	179,43	442,26
	3	5,64	18,24	27,88	59,00	104,92	153,92	239,24	589,68
	4	7,05	22,80	34,85	73,75	131,15	192,40	299,05	737,1
	5	8,64	27,36	41,82	88,50	157,38	230,88	358,86	884,52
	6	9,87	31,92	48,79	103,25	183,61	269,36	418,67	1031,94
	7	11,28	36,48	55,76	118,00	209,84	307,84	478,48	1179,36
	8	12,69	41,04	62,73	132,75	236,07	346,32	538,29	1326,78
	9	14,10	45,60	69,70	147,50	262,30	384,80	596,10	1474,2
	10	15,51	50,16	76,67	162,25	288,53	423,28	657,91	1621,62
	11	16,92	54,72	83,64	177,00	314,76	461,76	717,72	1769,04
	12	18,33	59,28	90,61	191,75	340,99	500,24	777,53	1916,46