


Single Check Filler Valves for Storage Tanks with Supplementary Back Check Valves

ΒΑΛΒΙΔΕΣ ΠΛΗΡΩΣΗΣ


3174C, 3194C and 6584C



3174C

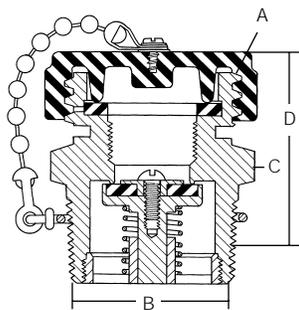

3194C, 6584C

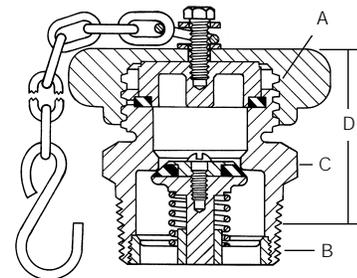

Application

Designed for use with RegO® Back Check Valves to provide fast filling of bulk storage tanks. Also may be used as a spare or replacement part.

These single check filler valves must never be installed directly into container couplings. They must be used with the appropriate back check valve to comply with NFPA Pamphlet #58.

Features

- Specifically for use with RegO® Back Check Valves.
- 6584C stem assembly reduces turbulence during filling and promotes higher filling rates.
- Specify RegO® Filler Valves on all your original tank purchases to insure quality and dependable performance.

Materials

Upper Body	Brass
Lower Body	Brass
Spring	Stainless Steel
Seat Disc	Synthetic Rubber
Cap (3194C, 6584C)	Brass
Cap (3174C)	Plastic

Ordering Information

Part Number	A ACME Hose Connection	B Outlet Connection M. NPT	C Wrench Hex Flats	D Effective Length (Approx.)	Propane Liquid Capacity at Various Differential Pressures (GPM)				For Use With Back Check Valve:
					5 PSIG	10 PSIG	25 PSIG	50 PSIG	
3174C	1 3/8"	1 1/4"	1 3/4"	1 11/16"	23	33	52	74	3176
6584C*	2 1/4"	2"	2 3/8"	2 1/4"	156	220	348	492	A3186
3194C	3 1/4"	3"	3 1/2"	3 7/16"	147	208	329	465	A3196

* Stem Assembly designed for higher filling rates.
NOTE: Multiply flow rate by .94 to determine liquid butane capacity.

Vapor Equalizing Valves

General Information

RegO® Vapor Equalizing Valves consist of an upper back check valve and lower excess flow valve. In the closed position, the attachment of a vapor hose coupling with its projecting nozzle, opens the back check valve to permit flow in either direction. The lower excess flow valve is designed to close automatically when flow out of the container being filled exceeds the rated capacity. The valve closes automatically when the coupling is removed. Like the double-check filler valves, the vapor equalizing valves utilize a two-piece body construction. The lower excess flow valve will permit some leakage when the upper back check valve is removed for emergency repairs or replacement.

RegO® Vapor Equalizing Valves are designed for use in both ASME and DOT containers.

- Seal cap made of tough, resilient molded plastic. Protects threads and internal working parts. Caps are designed to contain normal tank pressures, and must be kept on valves at all times.
- Long-wearing gasket permits hand-tight connection of cap and hose coupling.
- Seat disc of special synthetic composition is extra thick for longer life.
- Valve guide is precision machined to assure positive seal.

Spare Gasket Ordering Information

ACME	Part Number
1 1/4"	A2797-20R
1 3/4"	A2697-20R

