


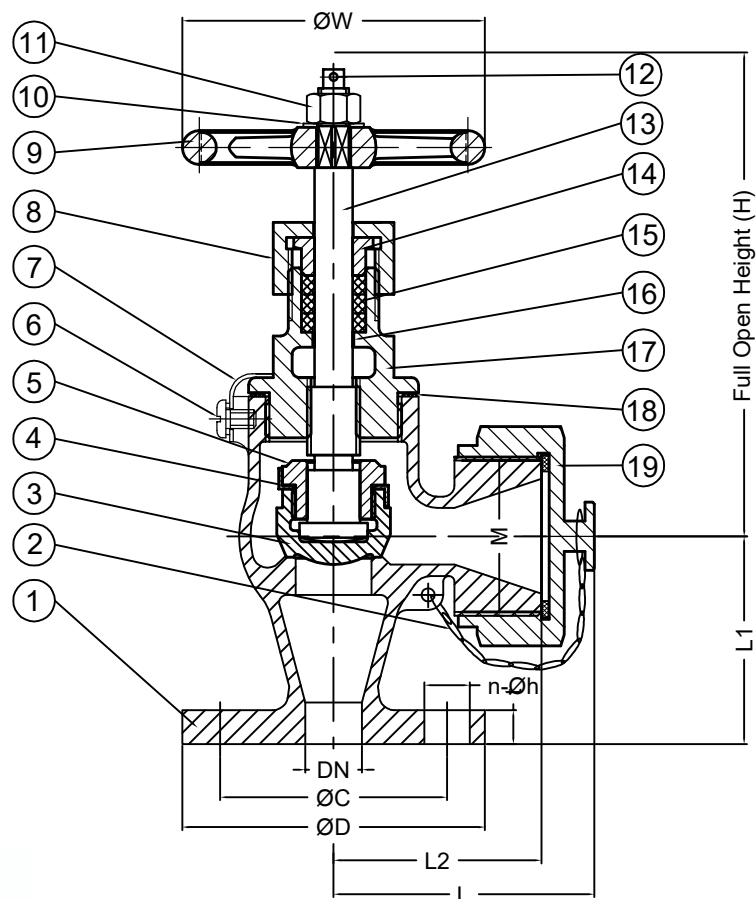

HYDRAULIC INSPECTION

TEST PRESSURE	BODY	1.03MPa
	SEAT	0.75MPa
	BASE CONNECTION	0.69MPa

PRESSURE RATING

FLUID CONDITION	MAXIMUM WORKING PRESSURE	
	DN15	DN25
STEAM OF 205°C OR LESS	0.49MPa	-
AIR		0.49MPa
PULSATION WATER		
NON-SHOCK WATER OF 120°C OR LESS	0.69MPa	

19	CAP	CAST BRONZE	BC6
18	GASKET	NON-ASBESTOS	
17	BONNET	CAST BRONZE	BC6
16	BONNET BUSH	FORGED BRASS	C3771BD
15	PACKING	FLEXIBLE GRAPHITE	
14	PACKING GLAND	FORGED BRASS	C3771BD
13	STEM	FORGED BRASS	C3771BD
12	SPLIT PIN	STAINLESS STEEL	SS304
11	HEXAGON NUT	GALV' STEEL	SS400
10	WASHER	STEEL	SS400
9	HAND WHEEL	CAST IRON	FC200
8	GLAND NUT	FORGED BRASS	C3771BD
7	LOCK PLATE	COPPER ALLOY	C2600P
6	SET SCREW	COPPER ALLOY	C2700W
5	DISC NUT	FORGED BRASS	C3771BD
4	DISC LOCK WASHER	COPPER ALLOY	C2600W
3	DISC	CAST BRONZE	BC6
2	CHAIN	STAINLESS STEEL	SS304
1	BODY	CAST BRONZE	BC6
NO.	NAME OF PART	MATERIAL	MARK

REV	DATE	DESCRIPTION OF REASON	DWG	CHK'D	APP'D
DESCRIPTION		JIS 7334B 5K CAST BRONZE HOSE ANGLE VALVES WITH COUPLING			
DWG		CHK'D	APP'D	SCALE	NON
Bing Lee		Christina	Figor	UNIT	mm
DATE		Jan.01,2014	DWG NO.		REV 0

RIKEX



CHRYSSAFIDIS S.A./ ATHENS: 3 AGRINIOU STR, TAVROS - (+30) 210 4836315-20 / THESSALONIKI: DA12A STR, OT32, BIPE SINDOU - (+30) 2310 754681-4 / www.chryssafidis.com / sales@chryssafidis.gr

MAIN DIMENSION FOR CONNECTING mm

MODEL	PN/DN	L	L1	L2	M	FLANGE DIMENSIONS				WIDTH	HEIGHT	WEIGHT
						ØD	ØC	n-Øh	t			
F7334B	5K25	78	65	65	M42*2	95	75	4*12	10	125	145	3.44