


■ PRESSURE RATING ■

FLUID CONDITION	MAX. WORKING PRESSURE
PULSATION WATER	0.98MPa
NON-SHOCK WATER OF 120°C OR LESS	1.37MPa

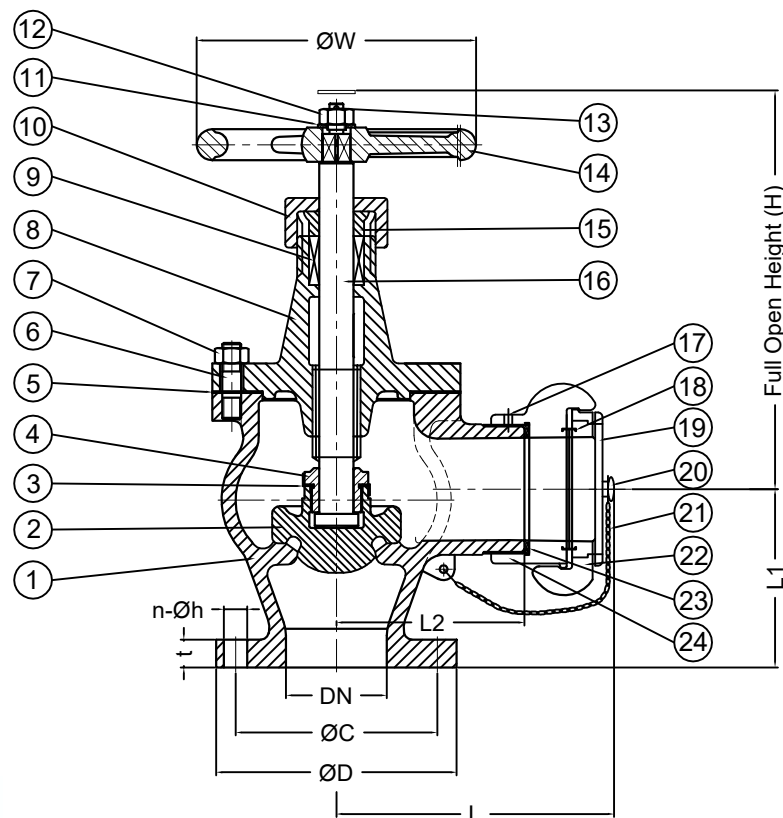

■ HYDRAULIC INSPECTION ■

TEST PRESSURE	BODY	2.06MPa
	SEAT	1.51MPa
	BASE CONNECTION	1.37MPa

24	HOSE BASE CONNECTION	CAST BRONZE	BC6
23	GASKET	NON-ASBESTOS	
22	COUPLING RING	CAST BRONZE	BC6
21	CHAIN	STAINLESS STEEL	SS304
20	CAP	CAST BRONZE	BC6
19	SET RING	CAST BRONZE	BC6
18	GASKET	NON-ASBESTOS	
17	SCREW	FORGED BRASS	C3771BD
16	STEM	FORGED BRASS	C3771BD
15	PACKING GLAND	FORGED BRASS	C3771BD
14	HAND WHEEL	CAST IRON	FC200
13	SPLIT PIN	STAINLESS STEEL	SS304
12	HEXAGON NUT	GALV' STEEL	SS400
11	WASHER	STEEL	SS400
10	GLAND NUT	FORGED BRASS	C3771BD
9	PACKING	FLEXIBLE GRAPHITE	
8	BONNET	CAST BRONZE	BC6
7	HEXAGON NUT	GALV' STEEL	SS400
6	STUD BOLT	GALV' STEEL	SS400
5	GASKET	NON-ASBESTOS	
4	DISC NUT	FORGED BRASS	C3771BD
3	DISC LOCK WASHER	COPPER ALLOY	C2600P
2	DISC	CAST BRONZE	BC6
1	BODY	CAST BRONZE	BC6
NO.	NAME OF PART	MATERIAL	MARK

REV	DATE	DESCRIPTION OF REASON	DWG	CHK'D	APP'D
DESCRIPTION		JIS F7334B 10K CAST BRONZE HOSE ANGLE VALVES WITH NAKAJIMA COUPLING			
DWG	CHK'D	APP'D	SCALE	NON	
Bing Lee	Christina	Figor	UNIT	mm	
DATE	Jan.01,2014	DWG NO.		REV	0

RIKEX



CHRYSsafidis

CHRYSsafidis S.A./ ATHENS: 3 AGRINIOU STR, TAVROS - (+30) 210 4836315-20 / THESSALONIKI: DA12A STR, OT32, BIPE SINDOU - (+30) 2310 754681-4 / www.chryssafidis.com / sales@chryssafidis.gr

MAIN DIMENSION FOR CONNECTING mm

MODEL	PN/DN	L	L1	L2	FLANGE DIMENSIONS				WIDTH ØW	HEIGHT H
					ØD	ØC	n-Øh	t		
F7334B	10K65	179.8	130	120	175	140	4*19	18	200	255