




CODE	Weight kg/pc	Volume m³/pc	Dn1	Dn2	S	D	L1	L2	L3	L	H1	H
12ETER3220	0,095	0,0002	32	20	3	42	37,5	45	63,5	110	70	91
12ETER1163	1,594	0,0044	110	63	5,8	140	83	68,5	156,5	288	150	220
12ETER1190	1,725	0,0048	110	90	8,2	140	83	88,5	156,5	288	170	240
12ETER1263	1,895	0,006	125	63	5,8	159	88	68,5	174	315	162	241,5
12ETER1290	2,029	0,0065	125	90	8,2	159	88	88,5	174	315	182	261,5
12ETER1211	2,433	0,0065	125	110	10	159	88	88,5	174	315	182	261,5
12ETER1663	2,586	0,0086	160	63	5,8	195	90	78,5	206	310	185	283
12ETER1690	2,88	0,0087	160	90	8,2	195	90	83,5	206	310	190	288
12ETER1611	2,733	0,0089	160	110	10	195	90	88,5	206	310	195	293
12ETER1612	3,12	0,009	160	125	11,4	195	90	93,5	206	310	200	298

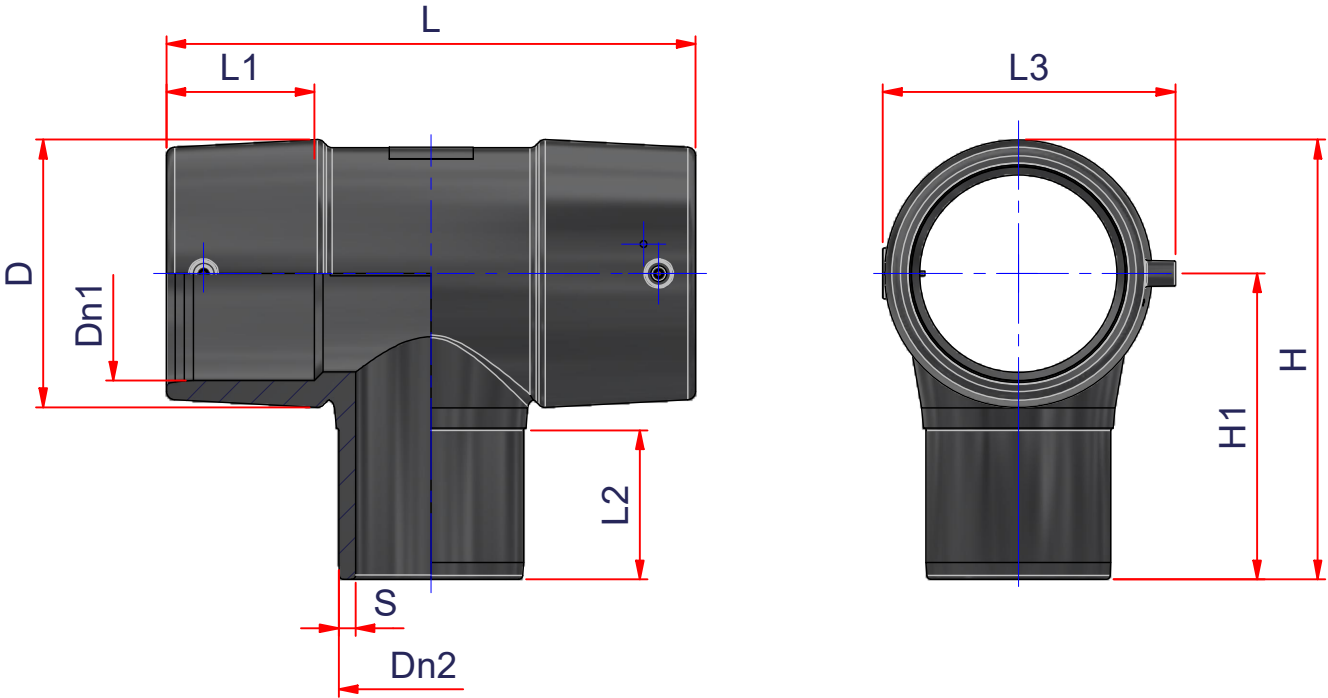

ITEM:
ETER

C:\Vault_TemplDisegni\Schede Tecniche\Elofit metric\Electrofusione fittings\EL10146.dwg

DESC: TEE RIDOTTO Elettrosaldabile
ELECTROFUSION REDUCING TEE WITH SPIGOT END PE100 SDR11
PFA/PN16



DRAWING No:


EL10146

SHEET OF REV.

1 3 -6



CODE	Weight kg/pc	Volume m ³ /pc	Dn1	Dn2	S	D	L1	L2	L	H1	H
12ETER1890	6,439	0,0499	180	90	8,2	225	93,5	84	716	197	309,5
12ETER1811	6,8	0,0499	180	110	10	225	93,5	95	716	197	309,5
12ETER1812	7,25	0,0511	180	125	11,4	225	93,5	100	716	205	317,5
12ETER1816	7,9	0,0358	180	160	14,6	225	93,5	110	716	210	222,5
12ETER2063	10,8	0,0564	200	63	5,7	240	108	70	766	187	307
12ETER2090	9,175	0,0601	200	90	8,2	240	108	90	766	207	327
12ETER2011	9,615	0,0601	200	110	10	240	108	87	766	207	327
12ETER2012	11,08	0,0616	200	125	11,4	240	108	95	766	215	335
12ETER2016	10	0,0631	200	160	14,6	240	108	103	766	223	343
12ETER2263	14	0,0743	225	63	5,7	273,5	115	70	806	200	337
12ETER2290	14,275	0,078	225	90	8,2	273,5	115	90	806	217	354
12ETER2211	14,22	0,078	225	110	10	273,5	115	87	806	217	354
12ETER2212	14,3	0,0798	225	125	11,4	273,5	115	95	806	225	362
12ETER2216	12,45	0,082	225	160	14,6	273,5	115	103	806	235	372
12ETER2218	14,85	0,082	225	180	16,4	273,5	115	110	806	235	372
12ETER2590	21,83	0,1041	250	90	8,2	308	125	90	876	232	386
12ETER2511	18,4	0,1112	250	110	10	308	125	116	876	258	412
12ETER2512	18,5	0,1055	250	125	11,4	308	125	95	876	237	391
12ETER2516	21,8	0,1082	250	160	14,6	308	125	105	876	247	401
12ETER2520	16,4	0,1112	250	200	18,2	308	125	116	876	258	412
12ETER3190	32	0,1879	315	90	8,2	380	145	74	933	340	530
12ETER3111	31,7	0,1649	315	110	10	380	145	97	933	275	465
12ETER3112	32,825	0,1649	315	125	11,4	380	145	97	933	275	465
12ETER3116	33,03	0,167	315	160	14,6	380	145	105	933	281	471
12ETER3118	33,137	0,1684	315	180	16,4	380	145	111	933	285	475
12ETER3120	33,394	0,1709	315	200	18,2	380	145	117	933	292	482
12ETER3122	33,781	0,1737	315	225	20,5	380	145	125	933	300	490
12ETER3125	34,301	0,178	315	250	22,7	380	145	135	933	312	502

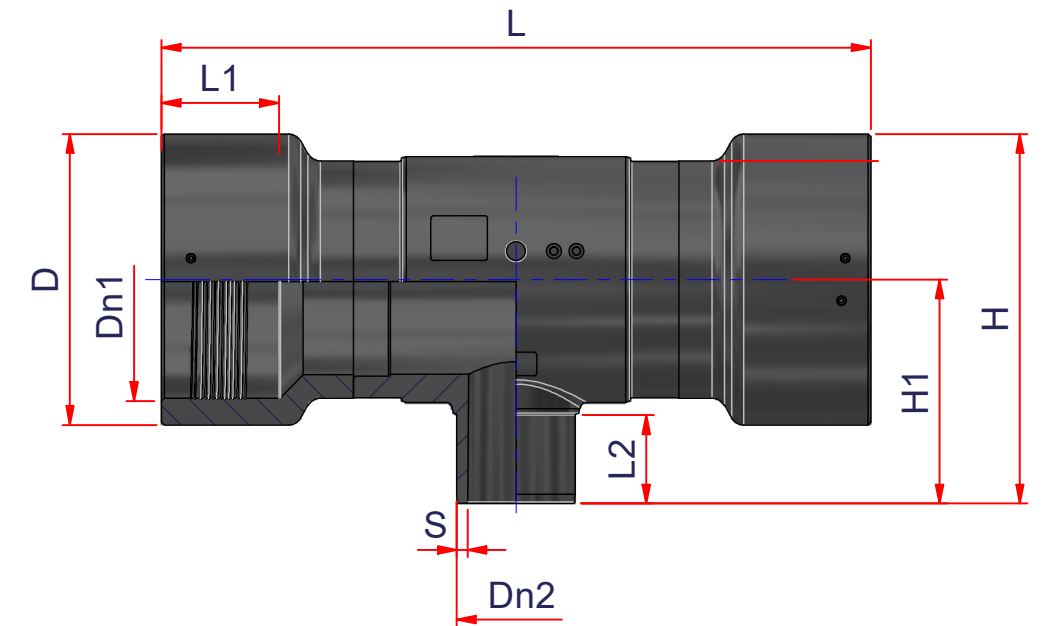

EloFIT

ITEM:

ETER

C:\Vault_Templ\Disegni\Schede Tecniche\Elofit metric\Electrofusione fittings\EL10146.dwg

DESC: TEE RODPTTA ELETROSALDABILE

ELECTROFUSION REDUCING TEE WITH SPIGOT END PE100 SDR11
PFA/PN16




DRAWING No:

EL10146

SHEET OF REV.

2 3 -6

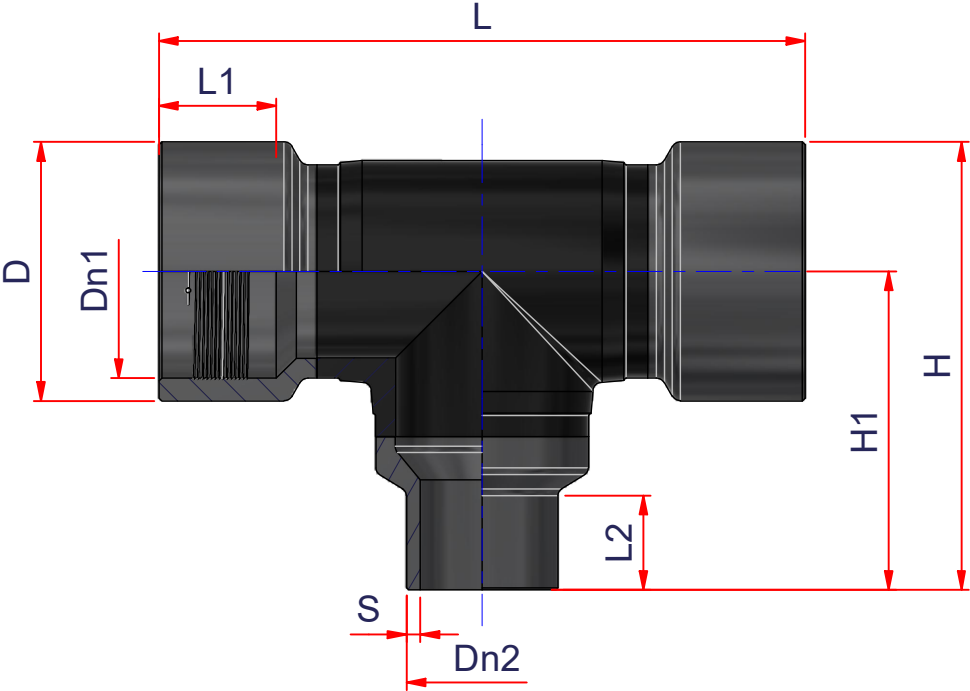

CODE	Weight kg/pc	Volume m ³ /pc	Dn1	Dn2	S	D	L1	L2	L	H1	H
12ETER2518	22,333	0,1282	250	180	16,4	308	125	103	810	360	514
12ETER3190	32	0,1879	315	90	8,2	380	145	74	933	340	530



ITEM:
ETER

DESC: TEE RODPTTA ELETTRISALDABILE
ELECTROFUSION REDUCING TEE WITH SPIGOT END PE100 SDR11
PFA/PN16



DRAWING No:
EL10146

SHEET OF
3 3

REV.
-6