



CODE	Weight kg/pc	Volume m³/pc	Dn	D	S	L1	L	H1	H
12EC032	0,047	0,0003	32	34,5	3	49,5	74	64	120
12EC040	0,09	0,0005	40	45	3,7	58	88	72	135
12EC050	0,13	0,0008	50	54	4,6	60	101	80	154
12EC063	0,227	0,0014	63	68	5,8	70	119	90	175
12EC075	0,365	0,0024	75	82	6,8	75	141	105	205
12EC090	0,63	0,0037	90	96,5	8,2	90	163,5	120	235
12EC110	0,933	0,005	110	115	10	87	179	120	242,5
12EC125	1,315	0,0069	125	130,5	11,4	95	199	130	265
12EC140	1,738	0,0093	140	146,5	12,7	97	221	140	287
12EC160	2,292	0,0136	160	172	14,6	103	254	150	311
12EC180	3,6	0,0196	180	187,5	16,4	110	284	180	369
12EC200	4,775	0,0262	200	208,5	18,2	117	312	195	402
12EC225	6,44	0,0351	225	234,5	20,5	125	343,5	210	436
12EC250	7,817	0,0448	250	260,5	22,7	135	372,5	220	462
12EC280	10,549	0,0636	280	288	25,4	155	420	250	526
12EC315	15,246	0,0834	315	334	28,6	170	450	260	555
12EC450*	-	0,3403	450	480	40,9	300	738,5	480	960
12EC500*	65,3	0,4009	500	530	45,4	300	788	490	960

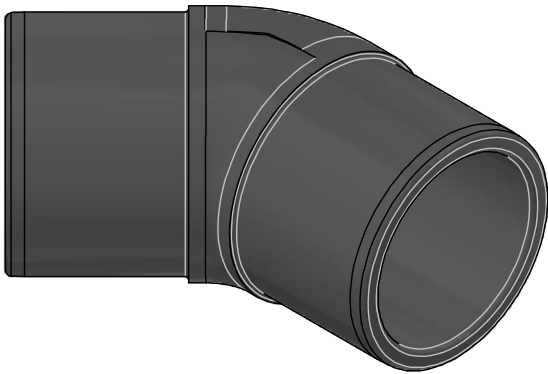

* Raccordo a codolo corto prolungato con tubo PE
Short spigot fitting extended with PE pipe

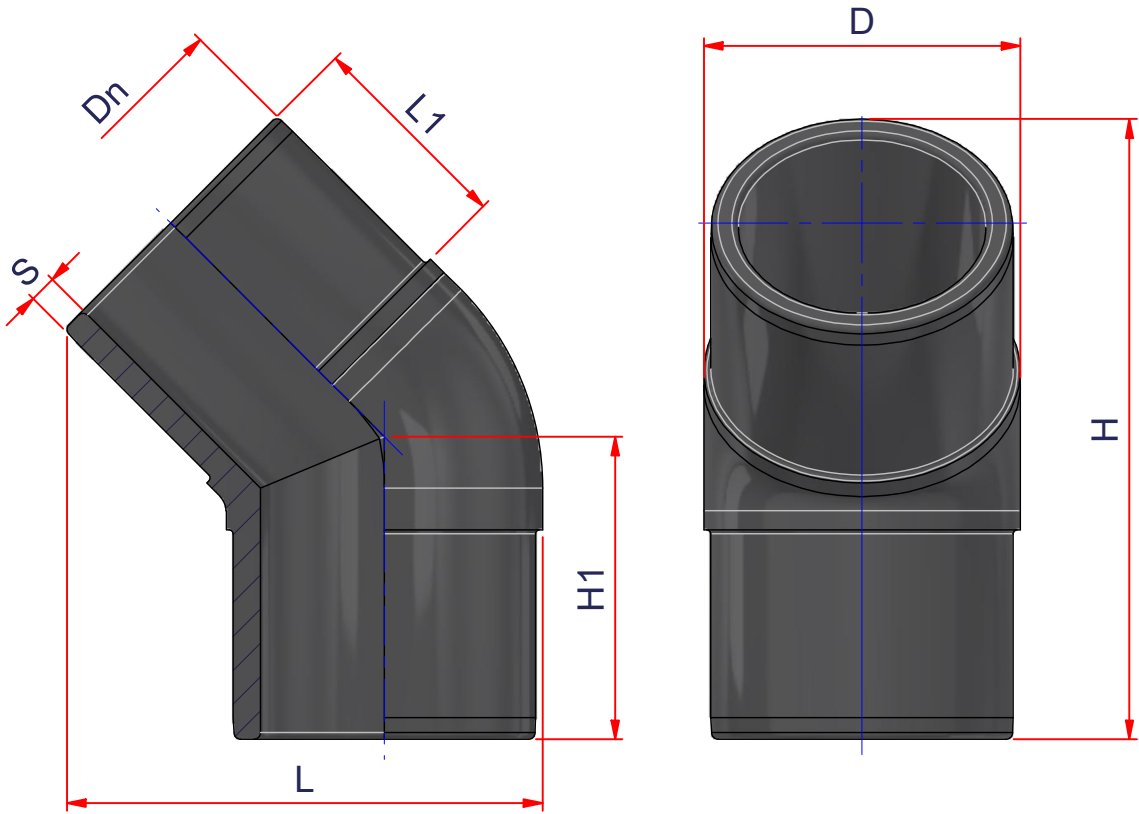


ITEM:

EC

C:\Vault_Templ\Disegni\Schede Tecniche\00_Metric\Elofit\Butt fusion fittings\EL10074.dwg

DESC: GOMITO 45° CODOLO LUNGO
45° ELBOW LONG SPIGOT
PE100 SDR11 PFA/PN16



DRAWING No:
EL10074
SHEET OF 1 1
REV. -6

www.nupiindustrieitaliane.com - info@nupinet.com

All dimensions have to be considered in millimeters with 5% tolerance if not otherwise mentioned excluding values as per standard EN 1555 (gas) and/or EN 12201 (water)