



ΧΡΥΣΑΦΙΔΗΣ Α.Ε.

ΒΙΟΜΗΧΑΝΙΚΑ ΕΙΔΗ ΓΙΑ ΝΕΡΟ, ΑΤΜΟ, ΦΥΣΙΚΟ ΑΕΡΙΟ & ΥΓΡΑΕΡΙΟ

ΑΘΗΝΑ : ΤΗΛ: (01) 4836315-20, FAX: (01) 4817000



ΘΕΣΣΑΛΟΝΙΚΗ : ΤΗΛ: (031) 754681-3, FAX: (031) 754684

e-mail: sales@chryssafidis.gr

Κωδικός	2420xxA
Σελίδα	1 από 1
Ημ/νία	4-Ιαν-00

ΒΑΝΕΣ ΣΥΡΤΟΥ ΧΥΤΟΣΙΔΗΡΕΣ ΚΙΝΑΣ

NON-RISING STEM WEDGE GATE VALVE DIN 3352

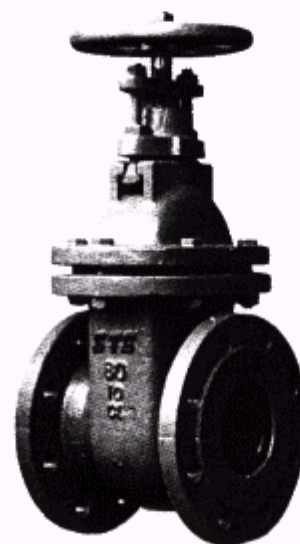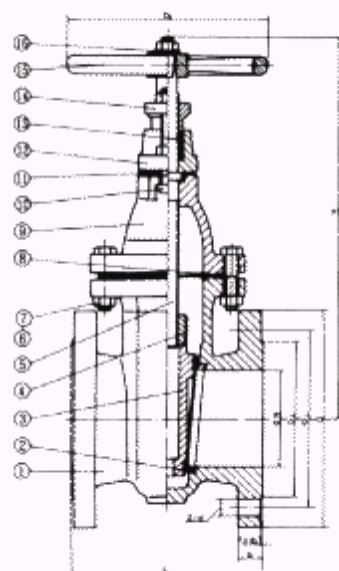

DIAMETER	40 – 150MM	200 – 300MM	350 – 400MM
NOMINAL PRESSURE	1.0MPa	0.6MPa	0.4MPa
SEAL TEST PRESSURE	1.0MPa	0.6MPa	0.4MPa
SHELL TEST PRESSURE	1.5MPa	0.9MPa	0.6MPa
SUITABLE MEDIA	WATER		
SUITABLE TEMPERATURE	-10°C TO 150°C		

DIMENSION (MM)

DN	L	D	D1	D2	b	f	Z-d	~H	D0
40	140	150	110	88	18	3	4-18	270	160
50	150	165	125	102	20	3	4-18	292	160
65	170	185	145	122	20	3	4-18	324	160
80	180	200	160	138	22	3	8-18	360	160
100	190	220	180	158	24	3	8-18	380	200
125	200	250	210	188	26	3	8-18	455	250
150	210	285	240	212	28	3	8-22	490	250
200	230	340	295	268	22	3	8-22	578	250
250	250	395	350	320	24	3	12-22	710	320
300	270	445	400	370	24	4	12-22	767	320
350	290	505	460	430	26	4	16-22	870	400
400	310	565	515	482	28	4	16-26	941	400

PART	MATERIAL
BODY, WEDGE, BONNET	CAST IRON
SEAT RING	CAST BRASS
WEDGE BUSHING	CAST BRASS
STEM	STAINLESS STEEL
BONNET GASKET	ASBESTOS BOARD
BOLT	STEEL
STUFFING BOX	CAST IRON
STUFFING BOX GASKET	ASBESTOS BOARD
PACKING	ASBESTOS CORD
GLAND FOLLOWER	CAST IRON
HANDWHEEL	CAST IRON
WASHER	STEEL

1. THE VALVE CONFORM TO DIN3352

2. FACE TO FACE DIMENSIONS CONFORM TO DIN3202 FOR NOMINAL PRESSURE OF 10 BAR

3. FLANGES DRILLED CONFORM TO DIN2501