



FLUVAL

Από το 1882



ΧΡΥΣΑΦΙΔΗΣ Α.Ε.

ΒΑΛΒΙΔΕΣ ΑΝΤΕΠΙΣΤΡΟΦΗΣ

ΕΜΒΟΛΟΥ 800#

399xxxΑ 1/1

VALVES

Piston Check Valve 800Lb

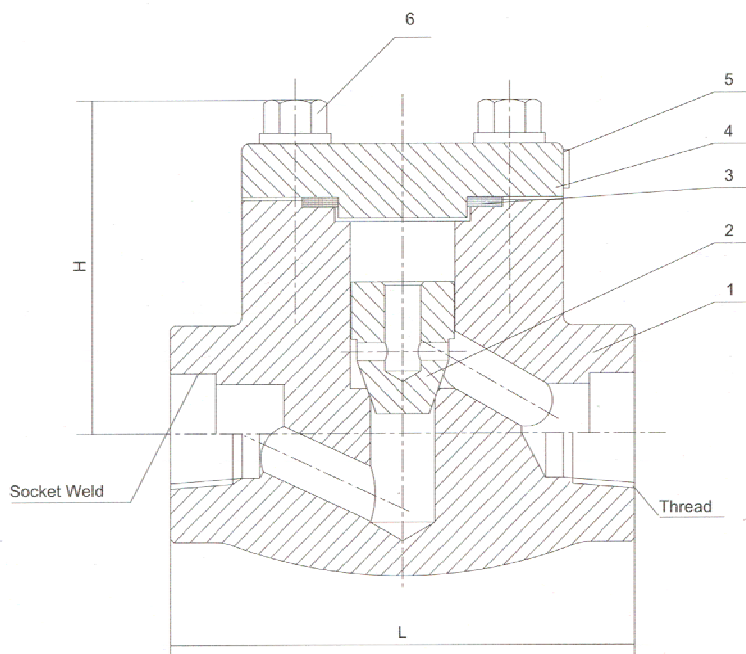


FIG NO: TH: 630118
SW: 630128

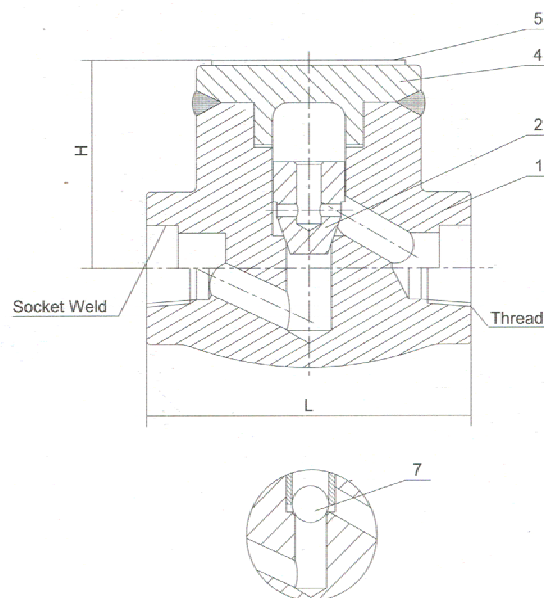


FIG NO: TH: 630218
SW: 630228

Standard Material Specifications

NO.	Part Name	CS To ASTM	AS To ASTM	SS To ASTM	
		Type A105	Type LF2	Type F304(L)	Type F316(L)
1	Body	A105	A182 LF2	A182 F304(L)	A182 F316(L)
2	Piston Disc	A276 410	A276 304	A276 304(L)	A276 316(L)
3	Gasket	Corrugated SS+graphite		SS+PTFE	
4	Bonnet	A105	A182 LF2	A182 F304(L)	A182 F316(L)
5	Nameplate	SS			
6	Bolt	A193 B7	A193 B16	A193 B8M	A193 B8M
7	Ball	A182 F304	A182 F304	A182 F304	A182 F304
Suitable Medium		W.O.G.etc	W.O.G.etc	HNO ₃ ,CH ₃ OOH etc	
Suitable Temperature		-29°C~425°C	-29°C~550°C	-29°C~180°C	

Note: Other materials are available upon request.

CS=Carbon Steel;AS=Alloy Steel;SS=Stainless Steel;

Dimensions(mm) and Weights(Kg)

NPS		Conv.	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
		Full		3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"
L			79	79	92	111	120	152	172
H(OPEN)			61	61	65	79	95	103	118
Weights	Bolted		1.4	1.2	1.5	3.1	3.9	5.6	8.9
	Welded		1.1	1.0	1.2	2.9	3.3	4.9	8.1